HAIHONG

EST. 2005
21 YEARS OF
SPECIALIST MACHINERY
MANUFACTURING

PRODUCT CATALOG

Built for more.



2026 PRODUCT CATALOGUE

MORE
THAN
MACHINES

HAIHONG

EST. 2005
21 YEARS OF
SPECIALIST MACHINERY
MANUFACTURING

MANUFACTURING EXPERTISE

BUILT WITH **PRECISION.**

From material to finished product,
quality begins long before assembly.



MORE THAN MACHINES

OUR STRENGTH

MANUFACTURING **EXCELLENCE.**

From advanced processes to strict quality control, we ensure every detail is built for greater durability, higher precision and long-term value.

01 | E-COATING PROTECTION

Full-coverage corrosion protection, including seams, cavities and hard-to-reach surfaces.



CHEMETALL · PPG · 10-YEAR CORROSION PROTECTION

02 | PRECISION MACHINING

CNC-machined structural components maintain precise geometry and alignment under heavy loads.



CNC BORING · HIGH-PRECISION MACHINING

03 | ROBOTIC WELDING

Automated welding delivers consistent penetration, repeatable accuracy and stronger structural joints.



PANASONIC ROBOTIC WELDING · >99% AUTOMATED

04 | PREMIUM FINISH

A smooth, high-gloss finish built to retain its appearance through years of demanding work.



E-COATING + POWDER COATING · LASTING APPEARANCE

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX100

Track Loader

0.5T CAPACITY

500 kg
RATED CAPACITY

17.1 kW
POWER OUTPUT

1,700 kg
OPERATING WEIGHT



MULTI-ATTACHMENT
Versatile attachment options.

WIDE TRACK
Wide-track stability.

RADIAL LIFT
Radial lift geometry.



Specifications

CTX100 Track Loader

General Specifications

Rated Capacity (35%)	500 kg
Tipping Load	1,428 kg
Operating Weight	1,700 kg
Travel Speed	7.5 km/h
Hinge Pin Height	2,201 mm

Hydraulics & Dimensions

Auxiliary Flow	50 L/min
System Pressure	190 bar
Overall Length	2,796 mm
Machine Width	1,026 mm
Overall Height	1,435 mm

Engine

Kubota	D1105
Power Output	17.1 kW

Capacities

Hydraulic Tank	17 L
Fuel Tank	30 L
Ground Pressure	30 kPa

Undercarriage


Track Width	250 mm
Track Layout	Elevated sprocket
Ground Clearance	222 mm
Departure Angle	31°


Technical Highlights

1,026 mm
Machine Width

50 L/min
Auxiliary Flow

2,201 mm
Hinge Pin Height

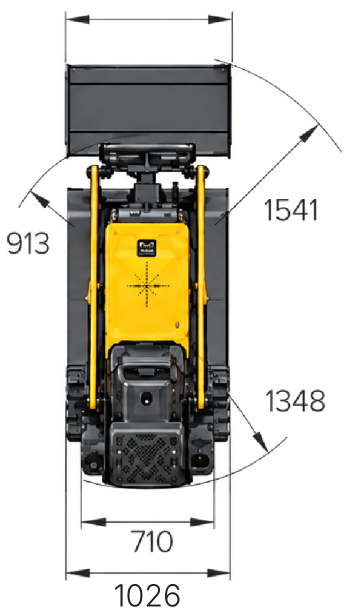

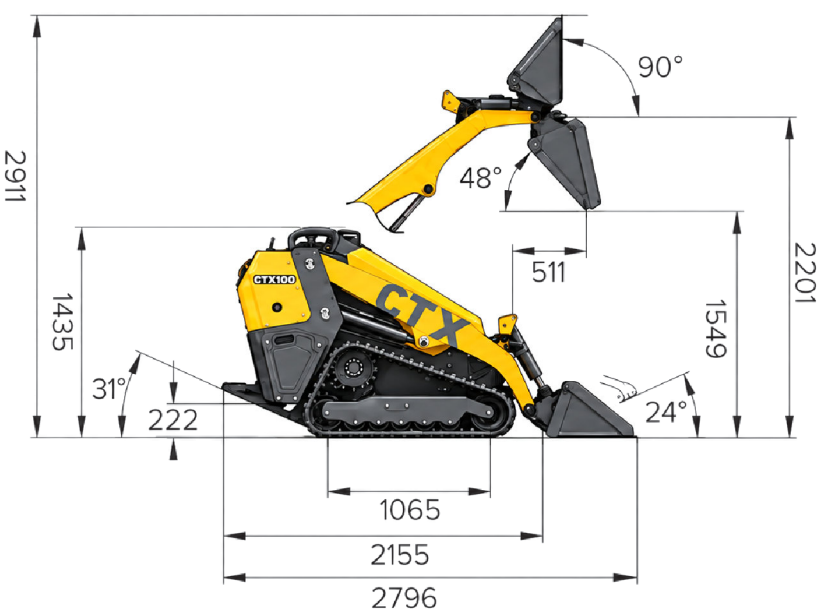

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX8012PRO

Mini Excavator

1.25T WEIGHT

1,250 kg
OPERATING WEIGHT

11.2 kW
POWER OUTPUT

1,875 mm
DIGGING DEPTH



YANMAR ENGINE
Yanmar diesel power.

SMOOTH HYDRAULICS
Smooth, responsive operation.

MULTI-ATTACHMENT
Versatile attachment options.



Specifications

CTX8012 PRO Mini Excavator

General Specifications

Operating Weight	1,250 kg
Bucket Capacity	0.03 m³
Travel Speed	2.1 / 3.3 km/h
Bucket Digging Force	13.1 kN
Ground Pressure	27 kPa

Digging & Hydraulics

Digging Depth	1,875 mm
Digging Height	3,124 mm
Boom Swing (L / R)	52° / 52°
System Pressure	180 bar
Pump Displacement	11.3 cm³/rev

Engine

Yanmar	3TNV74
Power Output	11.2 kW

Engine & Capacities

Displacement	0.993 L
Fuel Tank	10 L
Hydraulic Tank	15 L

Undercarriage


Chassis Width	842–1,060 mm
Track Material	Rubber
Track Width	180 mm
Track Length	1,300 mm

Technical Highlights

13.1 kN
Bucket Digging Force

180 bar
System Pressure

3.3 km/h
Travel Speed

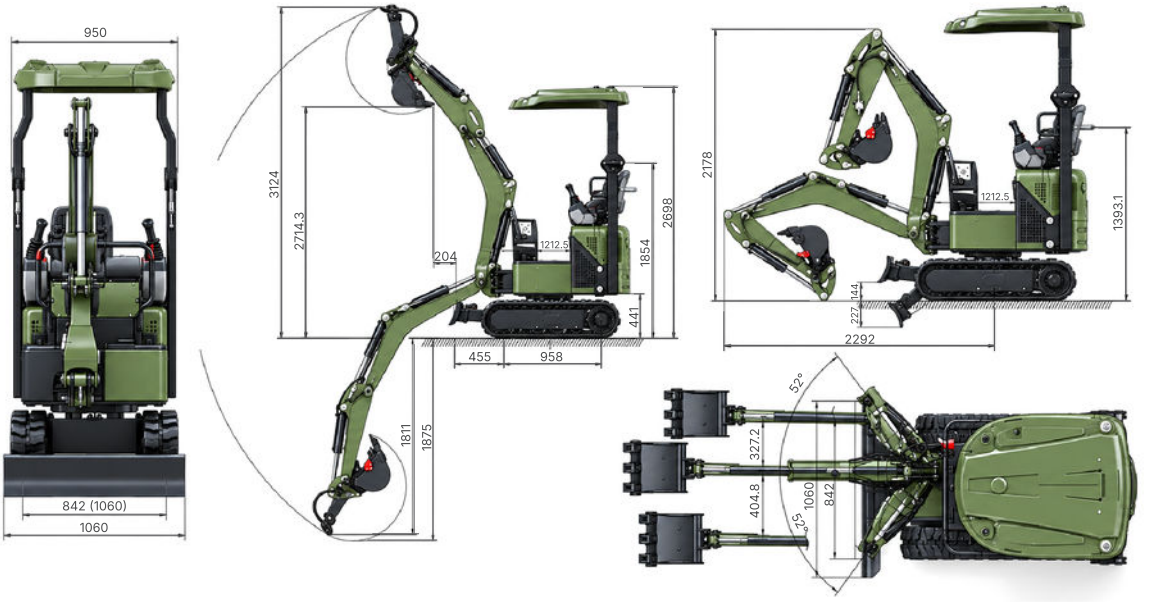

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX8022

Mini Excavator

2.5T WEIGHT

2,500 kg
OPERATING WEIGHT

22 kW
POWER OUTPUT

2,088 mm
DIGGING DEPTH



MULTI-ATTACHMENT
Versatile attachment options.

PISTON PUMP
Piston-pump hydraulics.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX8022 Mini Excavator

General Specifications

Operating Weight	2,500 kg
Bucket Capacity	0.08 m^3
Travel Speed	2.2 km/h
Bucket Width	490 mm
Cab Height	2,391 mm

Digging & Hydraulics

Digging Depth	2,088 mm
Digging Radius	4,023 mm
Dump Height	2,653 mm
System Pressure	180 bar
Boom Swing (L / R)	67° / 57°

Standard Engine

Changchai	ZN390
Power Output	22 kW
Rated Speed	2,200 rpm

Engine Option

Yanmar	3TNV80F
Optional Power	17.8 kW
Rated Speed	3,000 rpm

Undercarriage


Track Width	230 mm
Track Overall Width	1,130–1,440 mm
Ground Contact	1,235 mm
Blade Width	1,432–1,742 mm

Technical Highlights

180 bar
System Pressure

2,653 mm
Dump Height

2,391 mm
Cab Height

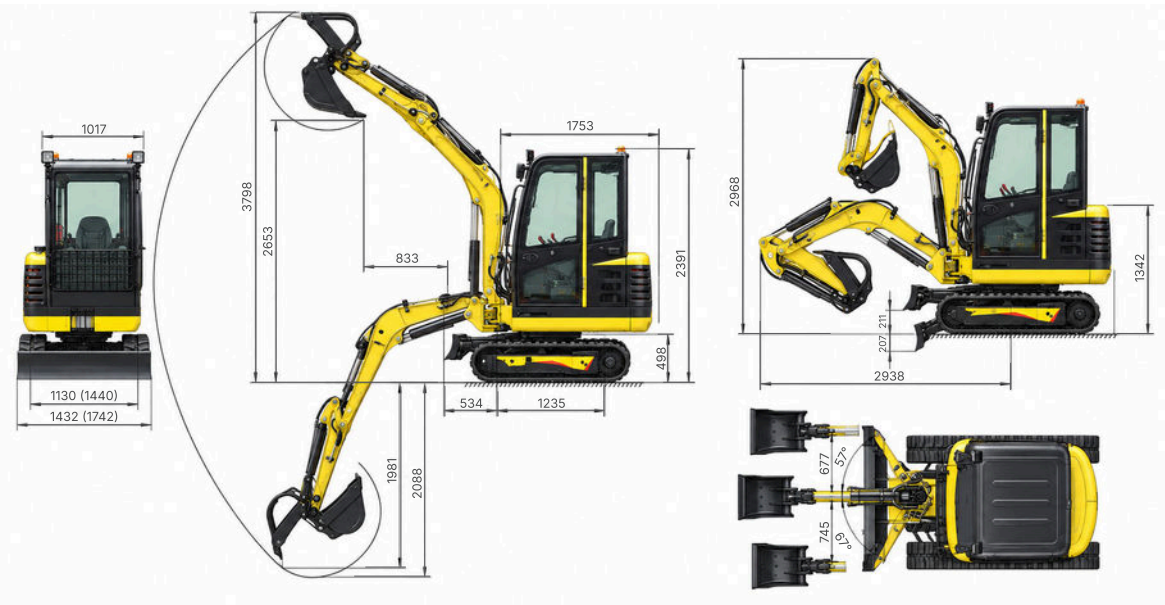

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

ZL10

Wheel Loader

1T CAPACITY

33 kW	0.4 m³	2,950 kg
POWER OUTPUT	BUCKET CAPACITY	OPERATING WEIGHT



COMPACT DESIGN
Compact machine footprint.

WIDE TYRES
Wide-tyre configuration.

EMISSION OPTIONS
Engine standards on request.



Specifications

ZL10 Wheel Loader

General Specifications

Rated Load	1,000 kg
Bucket Capacity	0.4 m^3
Operating Weight	2,950 kg
Max Dump Height	2,650 mm
Dimensions (L × W × H)	4,295 × 1,680 × 2,520 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	55 L/min
Lifting Time	3.5 s
System Pressure	160 bar

Power & Emission

Engine Make	FAWDE
Power Output	33 kW

Capacities

Fuel Tank	70 L
Hydraulic Tank	70 L
Engine Options	Available

Wheels & Steering


Tyre Size	31×15.5-15
Optional Tyre	12-16.5
Wheelbase	1,850 mm
Turning Radius	3,120 mm

Technical Highlights

1,000 kg
Rated Load

2,650 mm
Max Dump Height

55 L/min
Hydraulic Flow

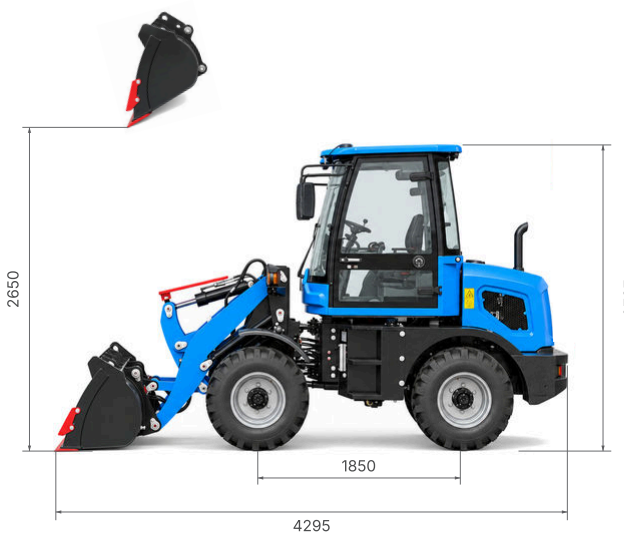



HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

ZL16

Wheel Loader

1.6T CAPACITY

36.8 kW	0.5 m³	3,800 kg
POWER OUTPUT	BUCKET CAPACITY	OPERATING WEIGHT



2.9 M DUMP HEIGHT
Reach higher unloading points.

MULTI-ATTACHMENT
Versatile attachment options.

EMISSION OPTIONS
Engine standards on request.



Specifications

ZL16 Wheel Loader

General Specifications

Rated Load	1,600 kg
Bucket Capacity	0.5 m^3
Operating Weight	3,800 kg
Max Dump Height	2,900 mm
Dimensions (L × W × H)	5,350 × 1,850 × 2,600 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	88 L/min
Lifting Time	5.7 s
Brake System	Air / hydraulic disc
Max. Torque	157 Nm

Power & Emission

Make/Model	XINCHAI A498BT1
Power Output	36.8 kW

Capacities

Fuel Tank	84 L
Hydraulic Tank	65 L
Engine Option	Yanmar 4TNV94L

Wheels & Steering

Tyre Size	23.5/70-16
Optional Tyre	33x15.5-16.5
Wheelbase	2,000 mm
Turning Radius	4,338 mm

Technical Highlights

1,600 kg
Rated Load

2,900 mm
Max Dump Height

88 L/min
Hydraulic Flow





HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX280
Wheel Loader

35.5 kW
POWER OUTPUT

0.45 m³
BUCKET CAPACITY

2,700 kg
OPERATING WEIGHT



YANMAR ENGINE
Yanmar diesel power.

ARTICULATED STEERING
Agile articulated steering.

MULTI-ATTACHMENT
Versatile attachment options.



Specifications

CTX280 Wheel Loader

General Specifications

Operating Weight	2,700 kg
Bucket Capacity	0.45 m^3
Traction Force	28 kN
Travel Speed	0–15 / 0–30 km/h
Tyre Size	31×15.5-15

Hydraulics & Steering

Auxiliary Flow	51 L/min
Auxiliary Pressure	230 bar
Articulation Angle	45°
Oscillation Angle	8.5°

Engine

Yanmar	4TNV86CT
Power Output	35.5 kW

Lifting Performance

Hinge Pin Height	2,498 mm
Full-turn Tipping Load	1,167 kg

Engine & Clearance


Ground Clearance	325 mm
Displacement	2.091 L
Cylinders	4
Rated Speed	2,400 rpm


Technical Highlights

28 kN
Traction Force

2,498 mm
Hinge Pin Height

1,167 kg
Full-turn Tipping Load

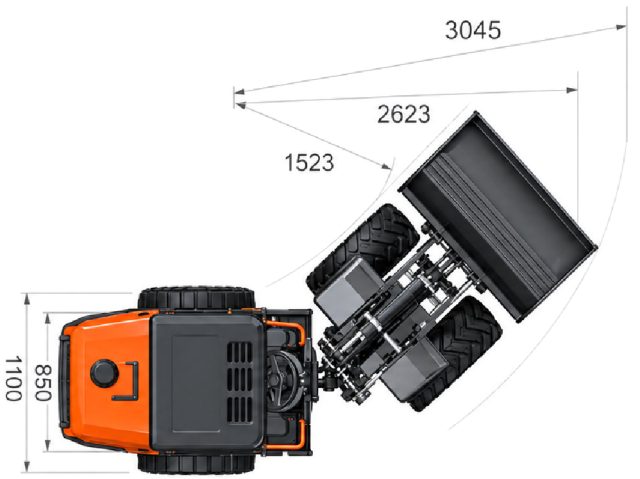

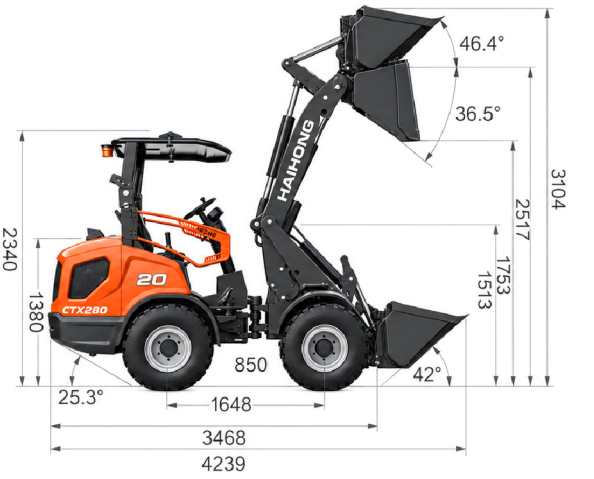

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

TL926

Telescopic Wheel Loader

2T CAPACITY

65 kW
POWER OUTPUT

0.7 m³
BUCKET CAPACITY

5,700 kg
OPERATING WEIGHT



TELESCOPIC BOOM
Extend the boom for greater reach.

MULTI-ATTACHMENT
Versatile attachment options.

EMISSION OPTIONS
Engine standards on request.



Specifications

TL926 Telescopic Wheel Loader

General Specifications

Rated Load	2,000 kg
Bucket Capacity	0.7 m^3
Operating Weight	5,700 kg
Max Dump Height	4,048 mm
Dimensions (L × W × H)	6,440 × 1,730 × 2,829 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	110 L/min
Lifting Time	6.0 s
Brake System	Air / hydraulic disc
Max. Torque	230 Nm

Power & Emission

Make/Model	YUNNEI YN33GBZ
Power Output	65 kW

Capacities

Fuel Tank	86 L
Hydraulic Tank	68 L

Wheels & Steering


Tyre Size	16/70-20
Wheelbase	2,788 mm
Steering Angle	36°
Drive Type	4WD


Technical Highlights

2,000 kg
Rated Load

4,048 mm
Max Dump Height

110 L/min
Hydraulic Flow

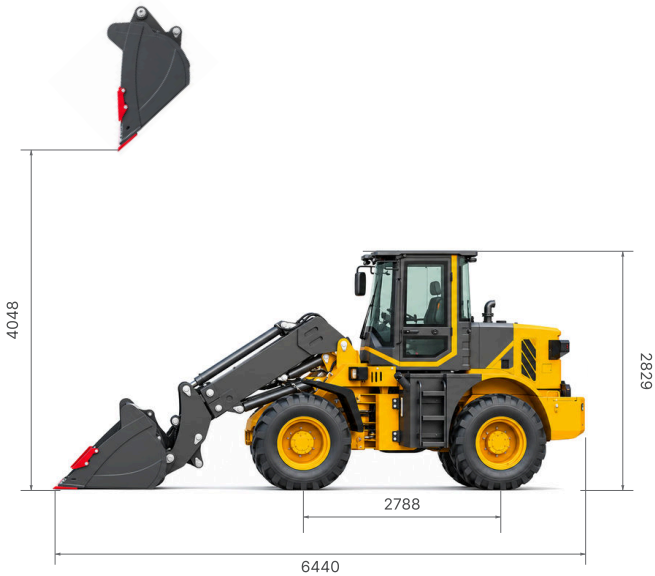

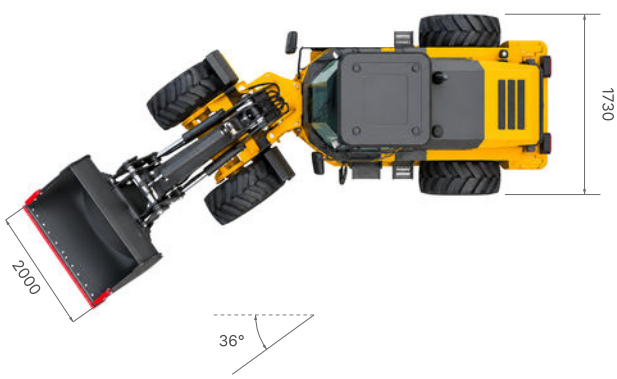

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX926

Wheel Loader

2T CAPACITY

65 kW
POWER OUTPUT

0.7 m³
BUCKET CAPACITY

5,000 kg
OPERATING WEIGHT



MULTI-ATTACHMENT
Versatile attachment options.

3.1 M DUMP HEIGHT
Reach higher unloading points.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX926 Wheel Loader

General Specifications

Rated Load	2,000 kg
Bucket Capacity	0.7 m^3
Operating Weight	5,000 kg
Max Dump Height	3,100 mm
Dimensions (L × W × H)	6,100 × 2,000 × 2,660 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	110 L/min
Lifting Time	6.0 s
Brake System	Air / hydraulic disc
Max. Torque	230 Nm

Power & Emission

Make/Model	YUNNEI YN33GBZ
Power Output	65 kW

Capacities

Fuel Tank	86 L
Hydraulic Tank	68 L

Wheels & Steering

Tyre Size	16/70-20
Wheelbase	2,020 mm
Turning Radius	4,540 mm
Drive Type	4WD


Technical Highlights

2,000 kg
Rated Load

3,100 mm
Max Dump Height

110 L/min
Hydraulic Flow



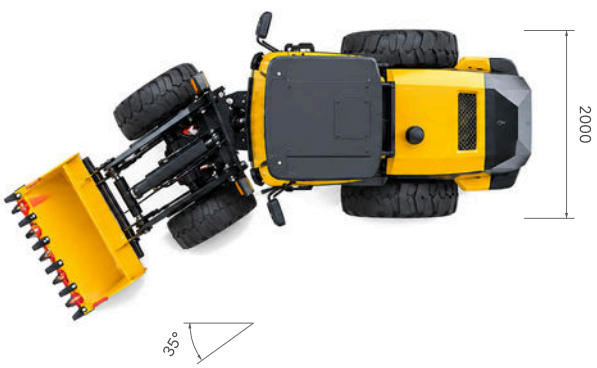

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX928

Wheel Loader

2.2T CAPACITY

76 kW	1.0 m³	5,700 kg
POWER OUTPUT	BUCKET CAPACITY	OPERATING WEIGHT



HUB-REDUCTION AXLE
Heavy-duty hub reduction.

3.2 M DUMP HEIGHT
Reach higher unloading points.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX928 Wheel Loader

General Specifications

Rated Load	2,200 kg
Bucket Capacity	1.0 m³
Operating Weight	5,700 kg
Max Dump Height	3,200 mm
Dimensions (L × W × H)	6,400 × 2,050 × 2,700 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	110 L/min
System Pressure	160 bar
Lifting Time	6.0 s
Max. Torque	260 Nm

Power & Emission

Make/Model	Yunnei YN38GBZ
Power Output	76 kW

Capacities

Fuel Tank	87 L
Hydraulic Tank	70 L

Wheels & Steering


Tyre Size	16/70-20
Wheelbase	2,580 mm
Turning Radius	4,640 mm
Steering Angle	35°


Technical Highlights

2,200 kg
Rated Load

3,200 mm
Max Dump Height

110 L/min
Hydraulic Flow

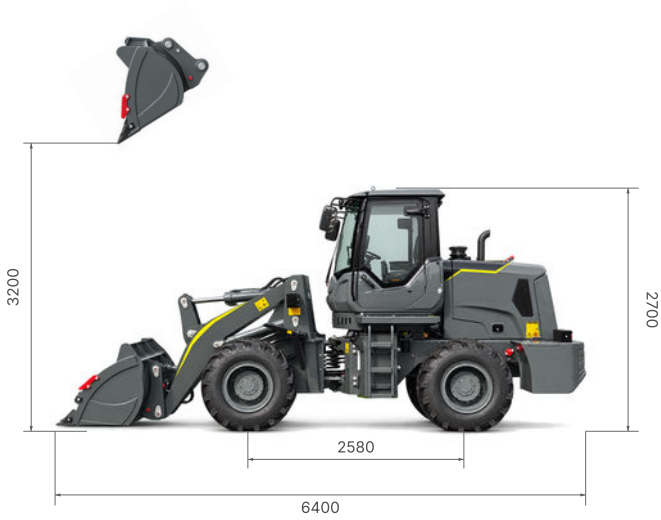

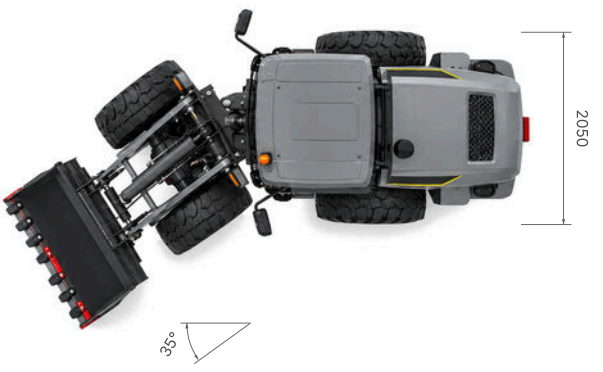

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX930

Wheel Loader

2.4T CAPACITY

92 kW
POWER OUTPUT

1.1 m³
BUCKET CAPACITY

6,200 kg
OPERATING WEIGHT



CUMMINS OPTION
Optional Cummins engine.

3.5 M DUMP HEIGHT
Reach higher unloading points.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX930 Wheel Loader

General Specifications

Rated Load	2,400 kg
Bucket Capacity	1.1 m^3
Operating Weight	6,200 kg
Max Dump Height	3,500 mm
Dimensions (L × W × H)	6,450 × 2,150 × 2,850 mm

Drivetrain & Hydraulics

Gears (F / R)	2 / 2
Hydraulic Flow	138 L/min
Lifting Time	6.2 s
Brake System	Air / hydraulic disc
Max. Torque	350 Nm

Power & Emission

Make/Model	YUNNEI YN48GBZ
Power Output	92 kW

Capacities

Fuel Tank	97 L
Hydraulic Tank	80 L
Cummins Option	4BTA3.9-C100

Wheels & Steering


Standard Tyre	16/70-24
Drive Type	4WD
Wheelbase	2,650 mm
Turning Radius	4,760 mm


Technical Highlights

2,400 kg
Rated Load

3,500 mm
Max Dump Height

138 L/min
Hydraulic Flow

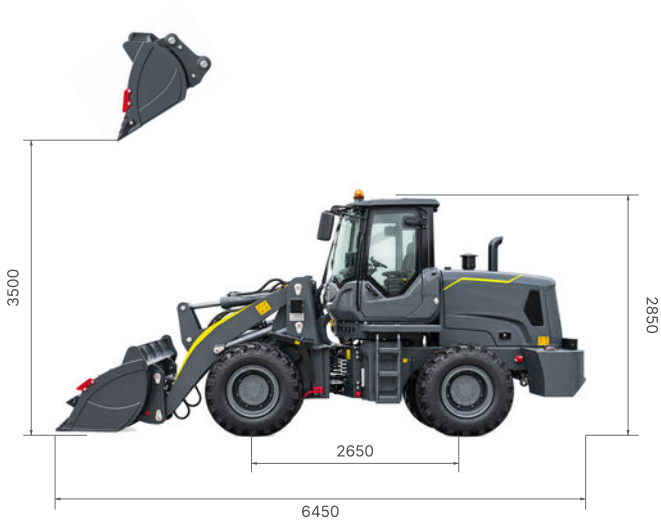

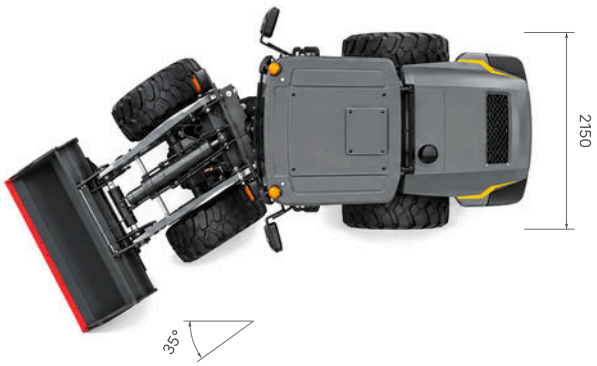

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX935

Wheel Loader

2.8T CAPACITY

92 kW
POWER OUTPUT

1.3 m³
BUCKET CAPACITY

8,500 kg
OPERATING WEIGHT



3.5 M DUMP HEIGHT
Reach higher unloading points.

6-CYLINDER ENGINE
Six-cylinder diesel power.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX935 Wheel Loader

General Specifications

Rated Load	2,800 kg
Bucket Capacity	1.3 m^3
Operating Weight	8,500 kg
Max Dump Height	3,500 mm
Dimensions (L × W × H)	7,200 × 2,400 × 3,100 mm

Drivetrain & Hydraulics

Gears (F / R)	4 / 2
Hydraulic Flow	176 L/min
Lifting Time	6.2 s
Brake System	Air / hydraulic disc
Max. Torque	570 Nm

Power & Emission

Make/Model	WP6G125E22
Power Output	92 kW

Capacities

Fuel Tank	130 L
Hydraulic Tank	130 L

Wheels & Steering


Tyre Size	17.5-25
Wheelbase	2,850 mm
Turning Radius	4,955 mm
Drive Type	4WD

Technical Highlights

2,800 kg
Rated Load

3,500 mm
Max Dump Height

176 L/min
Hydraulic Flow

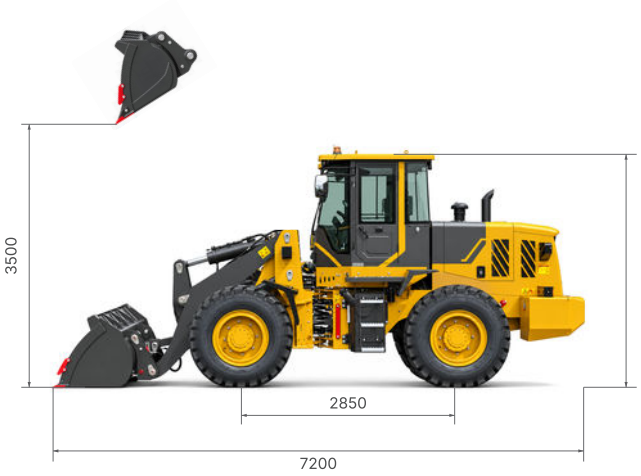



HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX939

Wheel Loader

3T CAPACITY

92 kW
POWER OUTPUT

1.7 m³
BUCKET CAPACITY

10,500 kg
OPERATING WEIGHT



CUMMINS OPTION
Optional Cummins engine.

3.5 M DUMP HEIGHT
Reach higher unloading points.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX939 Wheel Loader

General Specifications

Rated Load	3,000 kg
Bucket Capacity	1.7 m^3
Operating Weight	10,500 kg
Max Dump Height	3,500 mm
Dimensions (L × W × H)	7,900 × 2,430 × 3,070 mm

Drivetrain & Hydraulics

Gears (F / R)	4 / 2
Hydraulic Flow	220 L/min
Lifting Time	6.0 s
Brake System	Air / hydraulic disc
Max. Torque	570 Nm

Power & Emission

Make/Model	WP6G125E22
Power Output	92 kW

Capacities

Fuel Tank	180 L
Hydraulic Tank	160 L
Cummins Option	6BTA5.9-C150

Wheels & Steering


Tyre Size	17.5-25
Wheelbase	2,950 mm
Turning Radius	5,850 mm
Drive Type	4WD

Technical Highlights

3,000 kg
Rated Load

3,500 mm
Max Dump Height

220 L/min
Hydraulic Flow

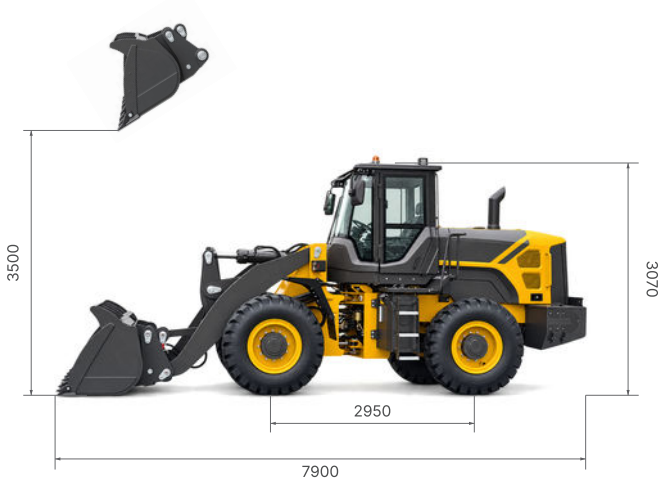



HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX940

Wheel Loader

4T CAPACITY

105 kW
POWER OUTPUT

2.5 m³
BUCKET CAPACITY

12,000 kg
OPERATING WEIGHT



CUMMINS OPTION
Optional Cummins engine.

4T RATED LOAD
4,000 kg rated capacity.

HIGH-PRESSURE SYSTEM
210 bar hydraulic pressure.



Specifications

CTX940 Wheel Loader

General Specifications

Rated Load	4,000 kg
Bucket Capacity	2.5 m^3
Operating Weight	12,000 kg
Max. Dump Height	3,200 mm
Dimensions (L × W × H)	7,950 × 2,470 × 3,120 mm

Drivetrain & Hydraulics

Gears (F / R)	4 / 3
Hydraulic Flow	220 L/min
System Pressure	210 bar
Brake System	Air Over Hydraulic Disc

Power & Emission

Engine Make/Model	Weichai WP6G140E22
Power Output	105 kW

Capacities

Fuel Tank	180 L
Hydraulic Tank	160 L

Wheels & Steering


Tyre Size	20.5-25
Steering Angle	38°
Turning Radius	5,850 mm
Wheelbase	3,050 mm

Technical Highlights

4,000 kg
Rated Load

3,200 mm
Max. Dump Height

210 bar
System Pressure

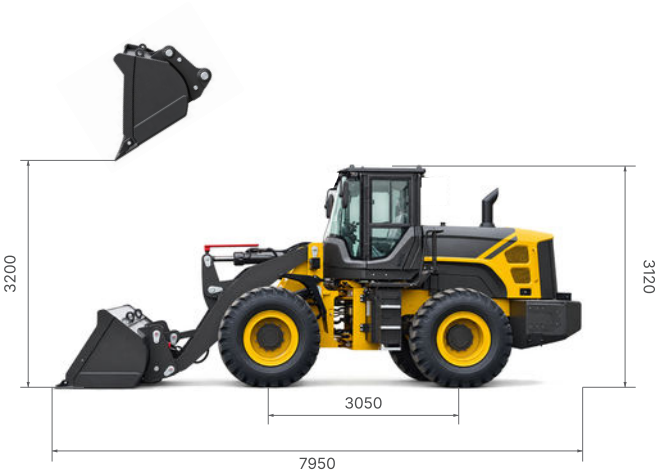



HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX956

Wheel Loader

5T CAPACITY

162 kW
POWER OUTPUT

3.0 m³
BUCKET CAPACITY

17,100 kg
OPERATING WEIGHT



CUMMINS OPTION
Optional Cummins engine.

5T RATED LOAD
5,000 kg rated capacity.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX956 Wheel Loader

General Specifications

Rated Load	5,000 kg
Bucket Capacity	3.0 m^3
Operating Weight	17,100 kg
Max Dump Height	3,200 mm
Dimensions (L × W × H)	9,050 × 3,050 × 3,450 mm

Drivetrain & Hydraulics

Optional Bucket	4.5 m^3
Combined Flow	369 L/min
Lifting Time	5.5 s
Brake System	Air / hydraulic disc
Max. Torque	910 Nm

Power & Emission

Make/Model	WD10G220E23
Power Output	162 kW

Capacities

Fuel Tank	220 L
Hydraulic Tank	180 L
Cummins Option	QSB6.7

Wheels & Steering

Tyre Size	23.5-25
Wheelbase	3,400 mm
Turning Radius	6,879 mm
Drive Type	4WD

Technical Highlights

5,000 kg
Rated Load

3,200 mm
Max Dump Height

369 L/min
Combined Flow





HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX960

Wheel Loader

6T CAPACITY

170 kW
POWER

3.5 m³
BUCKET CAPACITY

18,000 kg
OPERATING WEIGHT



ROCK BUCKET
Bucket for demanding work.

HEAVY DUTY AXLE
Built for heavy-duty work.

ROPS / FOPS
Protected operator cabin.



Specifications

CTX960 Wheel Loader

General Specifications

Rated Load	6,000 kg
Bucket Capacity	3.5 m^3
Operating Weight	18,000 kg
Lifting Time	5.5 s
Dimensions (L × W × H)	9,050 × 3,050 × 3,450 mm

Drivetrain & Hydraulics

Gears (F / R)	4 / 2
Combined Flow	369 L/min
Brake System	Air / hydraulic disc

Power & Emission

Make/Model	WD10G230E670
Power	170 kW

Capacities

Fuel Tank	220 L
Hydraulic Tank	180 L

Wheels & Steering

Tyre Size	23.5-25
Wheelbase	3,400 mm
Turning Radius	6,879 mm
Articulation Angle	38°

Technical Highlights

6,000 kg
Rated Load

5.5 s
Lifting Time

3,400 mm
Wheelbase





HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX980

Wheel Loader

8T CAPACITY

247 kW	5.0 m³	28,100 kg
POWER OUTPUT	BUCKET CAPACITY	OPERATING WEIGHT



ROCK BUCKET
Bucket for demanding work.

8T RATED LOAD
8,000 kg rated capacity.

WEICHAI ENGINE
Weichai diesel power.



Specifications

CTX980 Wheel Loader

General Specifications

Rated Load	8,000 kg
Bucket Capacity	5.0 m^3
Operating Weight	28,100 kg
Dump Height	3,530 mm
Size (L×W×H), mm	10500×3290×3760

Chassis & Working Range

Wheelbase	3,740 mm
Wheel Centres	2,590 mm
Turning Radius	8,650 mm

Engine

Weichai	WD12G336E211
Power Output	247 kW

Engine Options

Alternative Engine	Cummins
Emission Options	On request

Equipment


Tyre Size	26.5-25
Bucket Type	Rock bucket
Bucket Width	3,200 mm

Technical Highlights

8,000 kg
Rated Load

3,530 mm
Dump Height

3,740 mm
Wheelbase

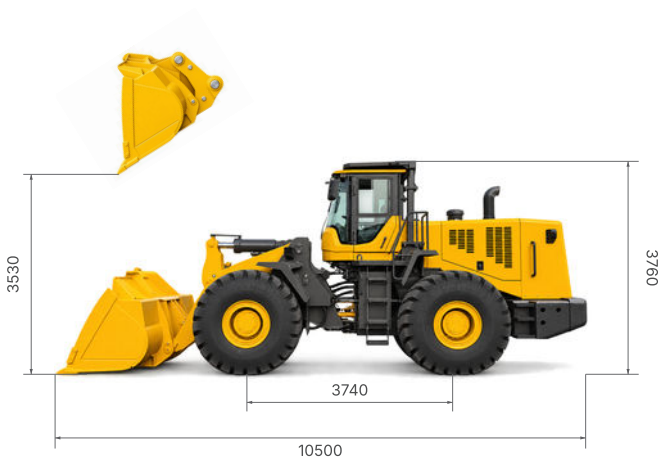



HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX388

Backhoe Loader

2.5T CAPACITY

70 kW	1.0 m³	8,200 kg
POWER OUTPUT	LOADER BUCKET	OPERATING WEIGHT



ELECTRONIC SHIFT
Electronic transmission control.

CENTER-MOUNT BACKHOE
Central backhoe layout.

MULTI-ATTACHMENT
Versatile attachment options.



Specifications

CTX388 Backhoe Loader

General Specifications

Operating Weight	8,200 kg
Loader Bucket	1.0 m^3
Backhoe Bucket	0.3 m^3
Loader Rated Load	2,500 kg
Travel Speed	38 km/h

Backhoe Performance

Digging Depth	4,500 mm
Digging Radius	5,600 mm
Digging Force	≥44 kN
Backhoe Dump Height	3,795 mm
Backhoe Layout	Centre mount

Engine

Weichai	WP4G95E221
Power Output	70 kW
Max. Torque	380 Nm

Loader Performance

Loader Dump Height	2,720 mm
Breakout Force	≥45 kN
Dump Reach	900 mm

Transmission & Tyres

Shift Control	Electronic, 4F/4R
Front Tyre	14-17.5-16PR
Rear Tyre	19.5L-24-14PR
Turning Radius	4,100 mm


Technical Highlights

4,500 mm
Digging Depth

2,720 mm
Loader Dump Height

≥44 kN
Digging Force



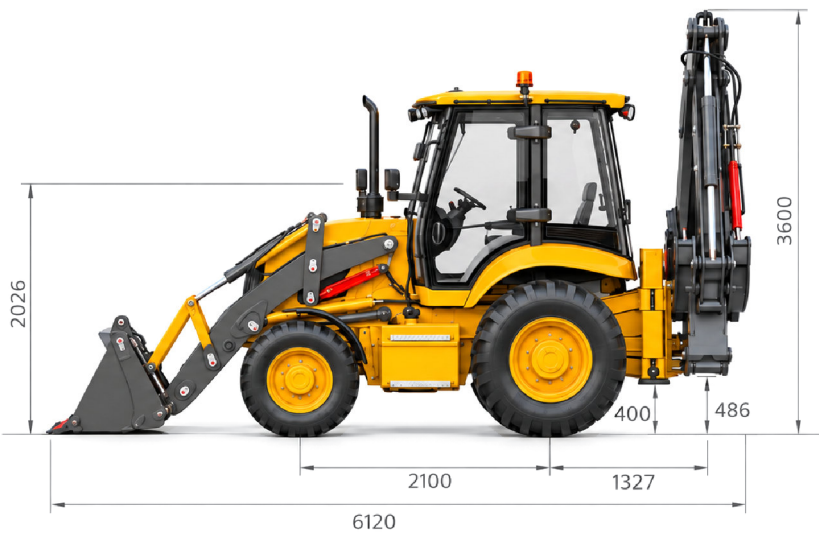

HAIHONG

ENGINEERED
FOR A STRONGER
TOMORROW

CTX30-25

Backhoe Loader

2.5T CAPACITY

76 kW
POWER OUTPUT

1.3 m³
LOADER BUCKET

7,500 kg
OPERATING WEIGHT



EXTENDABLE DIPPER
Extendable arm for added reach.

MULTI-ATTACHMENT
Versatile attachment options.

EMISSION OPTIONS
Engine standards on request.



Specifications

CTX30-25 Backhoe Loader

General Specifications

Operating Weight	7,500 kg
Rated Load	2,500 kg
Loader Bucket	1.3 m^3
Backhoe Bucket	0.3 m^3
Machine Height	3,222.5 mm

Backhoe & Systems

Digging Depth	3,749.7 mm
Digging Radius	4,980.9 mm
Digging Height	4,354.2 mm
Boom Swing	190°
Brake System	Air brake

Engine

Yunnei	YN38GBZ
Power Output	76 kW

Loader Performance

Loader Dump Height	3,420.9 mm
Loader Control	Pilot joystick
Travel Speed	25 km/h

Transmission & Tyres


Transmission	2F/2R
Tyre Size	16/70-20
Drive Type	4WD
Cummins Option	4BTA3.9-C100

Technical Highlights

3,749.7 mm
Digging Depth

4,980.9 mm
Digging Radius

3,420.9 mm
Loader Dump Height

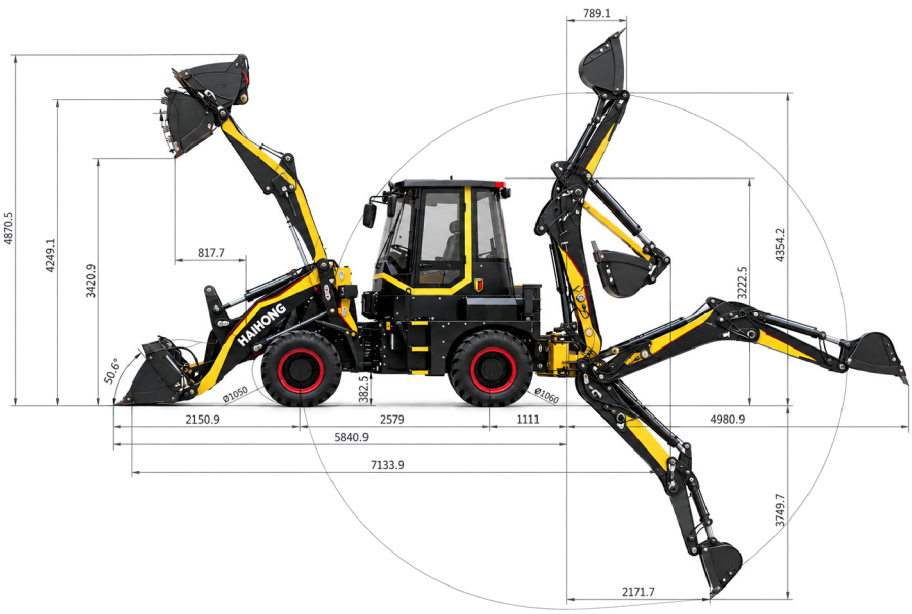


Built for more.
HAIHONG
MORE THAN MACHINES.
DONGJING ROAD, ECONOMIC ZONE
QINGZHOU, SHANDONG, CHINA
www.haihongmach.com
+86 536 3533666